

ORPHEUS | TWINS

Two Independently Tunable Optical Parametric Amplifiers

FEATURES

- Two OPA units in a single compact housing
- 210 nm – 16 µm tunable wavelength
- Single-pulse – 1 MHz repetition rate
- Standard pump energy up to 0.5 mJ (2 mJ upon request)
- Broadband and short-pulse (<100 fs) versions available
- CEP stable mid-infrared output available
- Integrated spectrometers for monitoring OPA output wavelength



ORPHEUS-TWINS consists of two independently tunable optical parametric amplifiers designed for flexible pump parameters and OPA configuration. The two channels can be separately configured to be a version of either ORPHEUS, ORPHEUS-ONE, ORPHEUS-F or even ORPHEUS-N. Both OPA units are integrated into a single housing and share the same


white light seed for amplification. The design of this OPA enables hands-free wavelength tuning, optional automated wavelength separation and the possibility of generating broadband mid-infrared radiation, in the region of 4 – 16 µm, with a passively stable Carrier Envelope Phase (CEP).


SPECIFICATIONS

| Model | ORPHEUS-TWINS |
|--|---|
| Required pump laser | PHAROS or CARBIDE |
| Accepted pump input pulse energy @ 1030 nm, 180 – 300 fs pulse duration | 8 µJ – 2 mJ |
| Supported repetition rates | Single-pulse – 1 MHz |
| Tuning range | Choice between ORPHEUS, ORPHEUS-F, ORPHEUS-N-2H or ORPHEUS-ONE configurations |
| Output pulse energy | Depends on the configuration – check the specifications of the chosen models |
| Pulse bandwidth | Depends on configuration, up to 100 – 750 cm ⁻¹ |
| Pulse duration | Depends on configuration, down to 40 fs |


PHYSICAL DIMENSIONS

| | |
|--|--------------------|
| Full dimension of the ORPHEUS-TWINS, including wavelength separation (W × L × H) | 810 × 430 × 164 mm |
| Full dimensions of the PHAROS+ORPHEUS-TWINS system with beam routing units (W × L × H) | 910 × 850 × 215 mm |



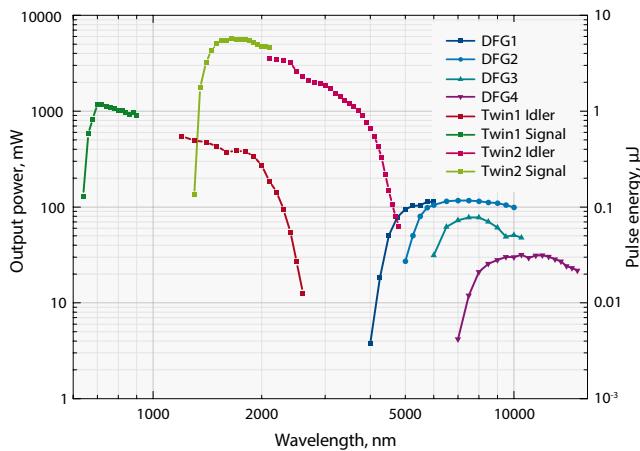


ORPHEUS-TWINS (ONE/F configuration)
output power conversion curve.
Pump: 40 W, 40 μ J, 1000 kHz

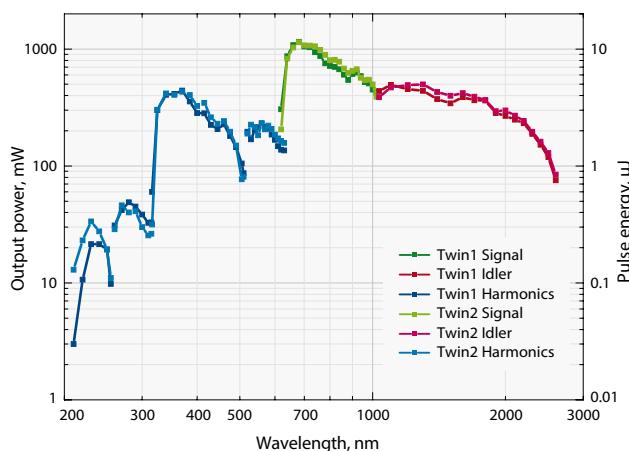

ORPHEUS-TWINS (ORPHEUS/ORPHEUS configuration)
output power conversion curve.
Pump: 20 W, 20 μ J, 100 kHz

For custom tuning curve value visit <http://toolbox.lightcon.com/tools/tuningcurves/>

OUTLINE DRAWINGS

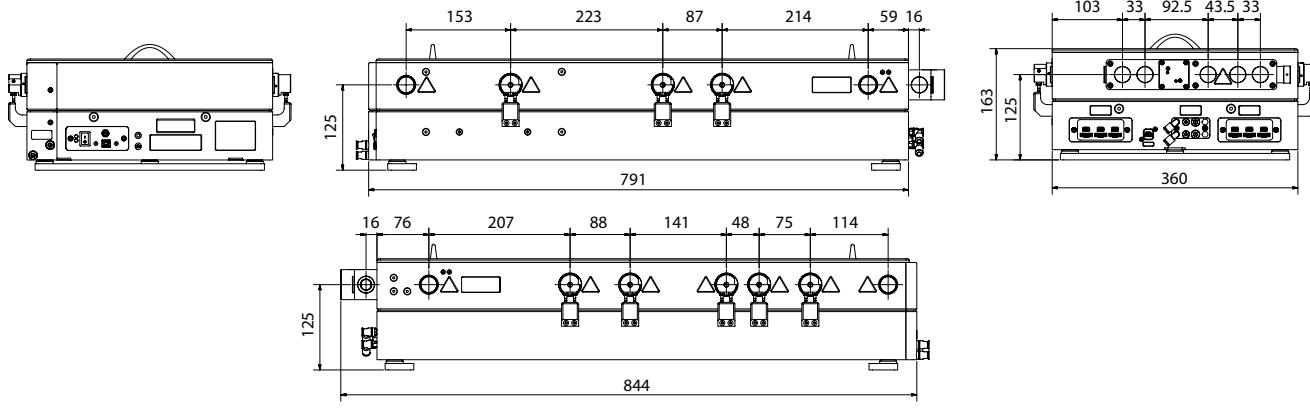

ORPHEUS-TWINS outline drawings



ORPHEUS-TWINS setup example